

5025

CUTOFF SAW



A TRADITION OF INNOVATION™



FEATURING

- Left model, feeds right to left.
- Up-cut saw design provides fast and accurate cuts.
- Fast cut rate allows up to 60 strokes per minute.
- Stroke speed adjustable to fit your cutting requirements.
- Quick adjusting workpiece clamp adds to your productivity.
- Large precision ground table and heavy gauge cabinet provide a stable work surface.
- Cast iron precision ground fence allows for a quick and accurate set up.
- Precision ground arbor is supported by high quality bearings.
- Conveniently positioned foot-switch allows hands-free operation.
- Full coverage guard includes an automatic kill switch for safety.
- Easy cabinet access for adjustments and quick blade changing.
- Saw blade included.
- High quality blade included as an added value.
- Built-in 4" dust port allows efficient dust management.
- Magnetic controls for safer operation.
- Powerful TEFC motor available in single or three-phase.
- Optional in feed and out feed tables with adjustable stops.

**2YEAR
LIMITED
WARRANTY**

CALL: 1-800-559-5065
To find a dealer near you!

Oliver Machinery : 6902 S. 194th Street, Kent, WA 98032 : 1-800-559-5065




5025

CUTOFF SAW




Shown with optional roller tables

CUTTING CAPACITY

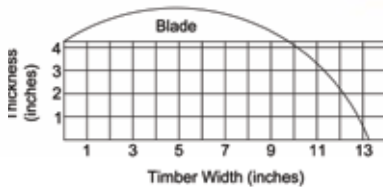

Model No. (Left)	5025
Stock No. (Left, 7-1/2HP, 1Ph)	5025.001
Stock No. (Left, 7-1/2HP, 3Ph)	5025.002
Stock No. (Left, 10HP, 3Ph)	5025.003
Arbor Speed	3,450 RPM
Arbor Size	1"
Blade Size	18"
Cutting Capacity at Maximum Height	4-1/4" x 9-3/4"
Cutting Capacity Width	1" x 13-3/8"
Table Size	26-1/4" x 27-1/2"
Table Height	32-3/4"
Air Supply Required	15 / 70 CFM/PSI
Maximum Cycles Per Minute	60 CPM
Dust Port	4"
Minimum Dust Removal	600 CFM
Main Motor	7-1/2HP, 1Ph, 220V Only
	7-1/2HP, 3Ph, 220/440V* Prewired 220V
	10HP, 3Ph, 220/440V* Prewired 220V
Gross Weight	800 lbs.
Gross Weight (Roller Table Set Infeed/Outfeed/lbs.)	150 lbs.

OPTIONAL ROLLER TABLES WITH ADJUSTABLE STOPS make repetitive cuts quick and accurate.

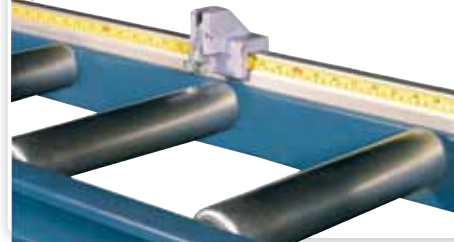

4" DUST PORT allow for efficient dust management for quick cutting operation.

FULL COVERAGE GUARDS help keep workers safe and productivity high.



RIGHT-HAND MODEL 5035 (feeds left to right) not pictured, available on special order only.

*Optional 440/460 volt available special order only. Additional cost/parts may apply.